



Softgel Tumble Dryer



TDS

Softgel Tumble Dryer

TD5

Features

- Anodized aluminum frame and stainless steel covers with number 4 finish for fast, thorough cleaning.
- Variable basket speeds (up to 80 rpm), completely adjusted through the operator's panel
- Maximum basket load - 12 kg.
- High capacity frequency drive blower unit
- Built in heating allows for gentle heating of specific products.
- Light-weight baskets with stainless steel perforated plate and large opening allow for quick changeovers, easy clean-up and inspection.
- Lightweight, simple to install, clear Lexan covers.
- Lighted motor housing service area.
- Quick change filter access doors.
- Easy lubrication from the side of the machine.
- Smooth surface in all areas for complete cleaning.


Mechanism

- PLC is incorporated within the stand alone unit
- One variable speed direct drive electrical motor rotates the baskets
- Programmable drying and capsule transfer time
- Pneumatic actuated doors allow capsules to be transferred throughout the tumbler and be discharged at the end of the drying cycle

Softgel Tumble Dryer

TD5

Specification

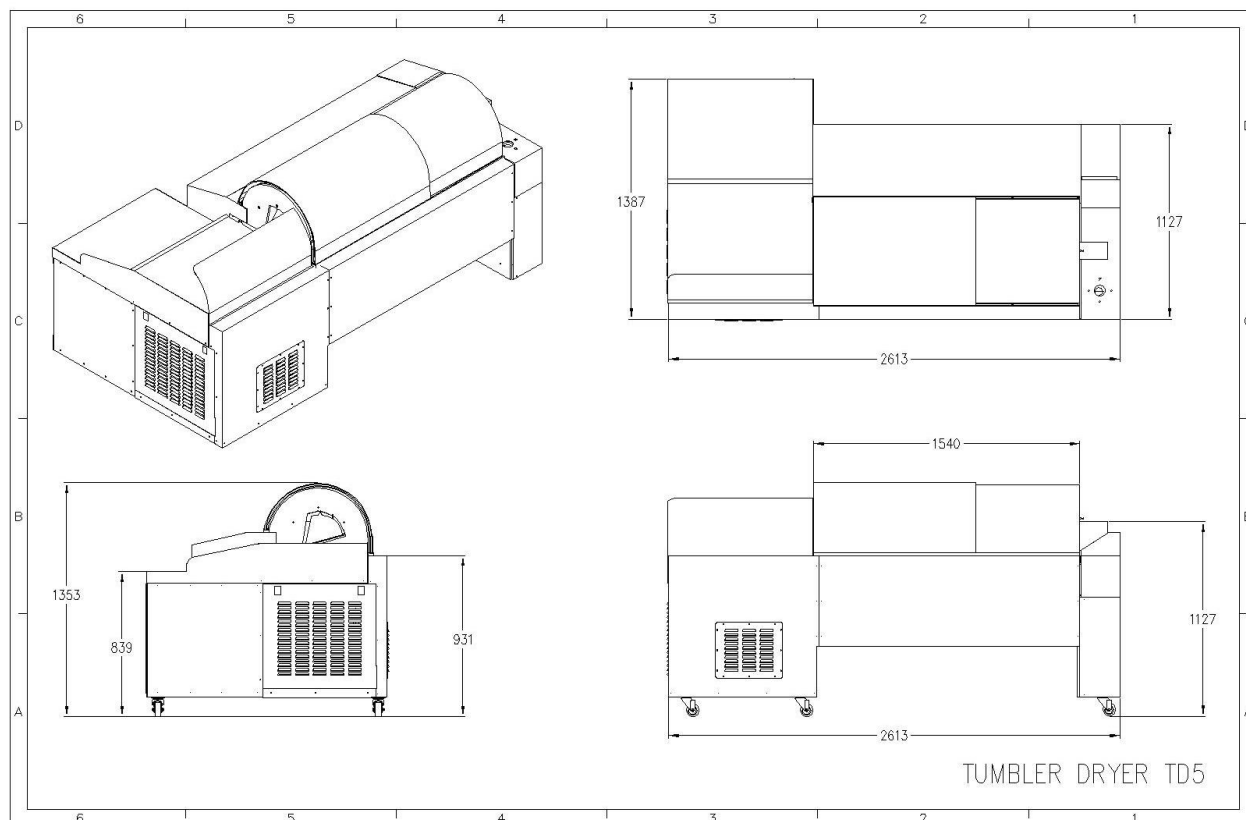

TD5	
Dimensions (mm)	2613 W X 1387 D X 1353 H
Weight (kg)	
TD Electrical Power	7 KVA without heaters
Compressed Air	8 Bar

TECHNOPHAR

Technophar Global Headquarters
3293 St. Etienne Blvd.
Windsor, Ontario, Canada N8W 5B1
Phone: +1 519-946-0800
www.technophar.com